
17.07.2014 RWd Date Signature Checked Fixing to timber and felt roof: Rooflight bedded in mastic & fixed with flat head wood screws at 300mm centres. Felt fitted by others to be taken to top of upstand. Roof build-up shown is indicative, with three layers of mineral felt Standard upstand height can be varied if required. Timber packer same Finished Roof thickness as insulation Opening. board. Timber Roof Structure.

General Notes:

1. Do not scale this drawing.

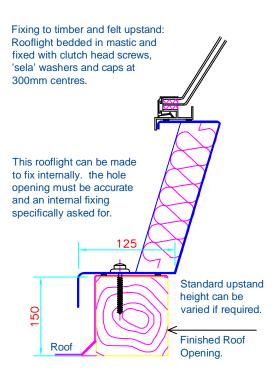

(For a 600x600 rooflight make finished hole size 600x600 etc.)

(For a 600x600 rooflight make finished hole size 600x600 etc.)

2. KERB ADAPTOR UPSTAND

Scale 1:5



Drawing updated

Revision note

tie/Name									
SOLUS	NON	VEN	TED	ROC	FI				

Drawn	Date	Scale	Drawing number	
SY	-	As	STD - 016	
		Shown		